

VapR-free

Underlay Support Tray



Key Features

- ◆ **Versatile**
- ◆ **Environmentally Friendly**
- ◆ **Light**
- ◆ **New and Refurbishment**
- ◆ **Prevents Ponding**
- ◆ **Eliminates tilting fillet**
- ◆ **Unique 50mm or 70mm gutter flange hinge**
- ◆ **Allows easy access to gutter**
- ◆ **Waterproof**

Mercury Building Products recommend the use of an Underlay Support Tray in both Open and Closed eaves construction when a Vapour Permeable Membrane is used as the roof underlay in a pitched roof application.

VapR-free Underlay Support Tray is manufactured from polyolefin re-grind material and is available in light easy to handle rigid 1.5 metre lengths.

This unique product accommodates all roof pitches and is suitable for New Build and Refurbishment.

It prevents ponding and the need for a tilting fillet behind the fascia board providing a clear drainage point into the gutter.

Two unique hinges give the option of a 50 mm or 70 mm gutter flange (required when a counter batten has been installed) and also allows for the gutter to be easily installed or replaced. The unused hinge acts as a nail fixing line.


VapR-free Underlay Support Tray is waterproof and prevents prolonged exposure of the underlay to U.V. radiation, reducing long term maintenance.

Mercury Building Products Limited
114 Eckington Road, Coal Aston
Dronfield S18 3AY



Mercury Building Products Limited
Unit 45, Station Lane Industrial Estate
Old Whittington, Chesterfield

Tel: 01246 292816 Fax: 01246 292867 Mobile: 07775 998148

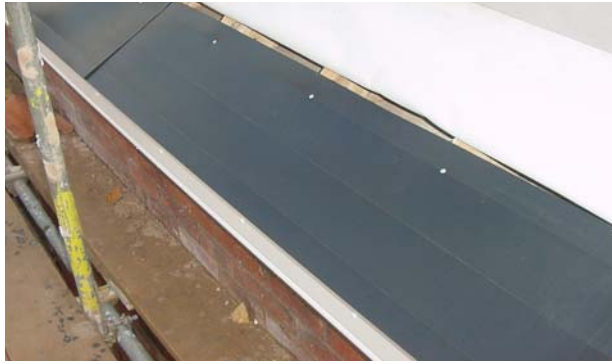

Installation Guide

VapR-free Underlay Support Tray should be positioned (rough side up) to the lower part of the rafters at the eaves with the hinge on the outside of the fascia board.

The 50 mm or 70 mm hinge is folded over the fascia board and into the gutter. Alternatively it can be left flat if the gutter is to be installed at a later date.

Each length should have a minimum of 100 mm overlap and fixing should occur on each rafter by simply nailing or stapling along the unused hinge line. The roof underlay is positioned over the underlay support tray by a minimum of 200 mm but must not overspill into the gutter.

Double-sided adhesive tape should be used to seal the eaves carrier and underlay if requiring a completely sealed roof.

Batten out roof and slate or tile as normal.



Product Data

Material	Re-cycled Polyolefins
Colour	Black
Weight/20 No.	16 kilo approx.
Size	1.5 metre long


Packaging

Quantity/Pack	20 No.
Quantity/Pallet	600 No.



Technical and Sales Support

VapR-free Vapour Permeable Underlay and VapR-free Underlay Support Trays are available from Mercury Building Products Limited who offer a full Technical and Sales Support Service to Specifiers and Contractors.
Telephone: 01246 292816

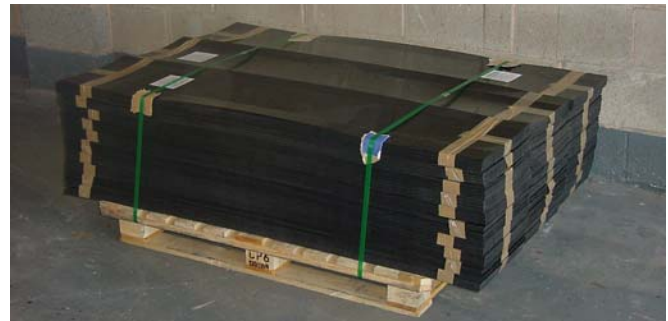

Other Products



VapR-free

**HIGH PERFORMANCE
VAPOUR PERMEABLE ROOF TILE UNDERLAY**
for
WARM AND COLD PITCHED ROOFS
Without the use of roof space ventilation