

# VapR-free

## Underlay Support Tray



### Key Features

- ◆ *Versatile*
- ◆ *Environmentally Friendly*
- ◆ *Light*
- ◆ *New and Refurbishment*
- ◆ *Prevents Ponding*
- ◆ *Eliminates tilting fillet*
- ◆ *Unique hinge enables gutter flange to be easily positioned*
- ◆ *Allows easy access to gutter*
- ◆ *Waterproof*

**Mercury Building Products recommend the use of an Underlay Support Tray in both Open and Closed eaves construction when a Vapour Permeable Membrane is used as the roof underlay in a pitched roof application.**

VapR-free Underlay Support Trays are manufactured from polyolefin re-grind material and are available in light easy to handle rigid 1.5 metre lengths.

This unique product accommodates all roof pitches and is suitable for New Build and Refurbishment.

It prevents ponding and the need for a tilting fillet behind the fascia board providing a clear drainage point into the gutter.

A unique hinge allows the gutter flange to be positioned at the appropriate angle of the roof. It also enables the gutter to be easily installed or replaced without the tile assembly being disturbed.

VapR-free Underlay Support Tray is waterproof and prevents prolonged exposure of the underlay to U.V. radiation, reducing long term maintenance.

**Mercury Building Products Limited**  
114 Eckington Road, Coal Aston  
Dronfield S18 3AY




**Mercury Building Products Limited**  
Unit 45, Station Lane Industrial Estate  
Old Whittington, Chesterfield

**Tel: 01246 292816**

**Fax: 01246 292867**

**Mobile: 07775 998148**

**[www.vapr-free.com](http://www.vapr-free.com)**

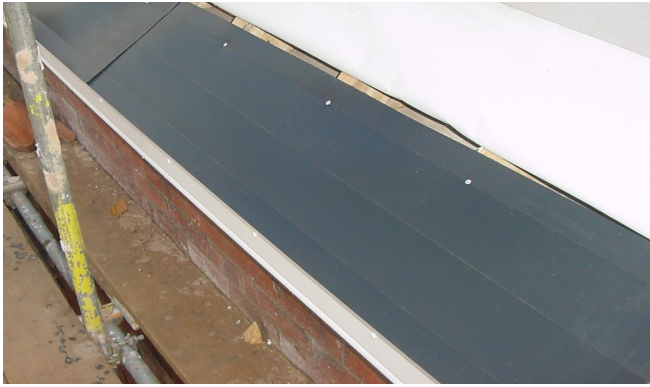

## Installation Guide

VapR-free Underlay Support Tray should be **positioned (rough side up) to the lower part of the rafters at the eaves** with the hinge on the outside of the fascia board.

**The 50 mm hinge is folded over the fascia board and into the gutter.** Alternatively it can be left flat if the gutter is to be installed at a later date.

Each length should have a minimum of 100 mm overlap and fixing should occur on each rafter by simply nailing or stapling onto each rafter. The roof underlay is positioned over the underlay support tray by a minimum of 200 mm but must not overspill into the gutter.

Double-sided adhesive tape should be used to seal the eaves carrier and underlay if requiring a completely sealed roof.

Batten out roof and slate or tile as normal.



## Product Data

Material	Re-cycled Polyolefins
Colour	Black
Weight/20 No.	16 kilo approx.
Size	1.5 metre long

## Packaging

Quantity/Pack	20 No.
Quantity/Pallet	600 No.



## Technical and Sales Support

VapR-free Vapour Permeable Roof Tile Underlay and VapR-free Underlay Support Trays are available from Mercury Building Products Limited who offer a full Technical and Sales Support Service to Specifiers and Contractors.  
Telephone: 01246 292816 ([www.vapr-free.com](http://www.vapr-free.com))



## Other Products



***VapR-free***  
**HIGH PERFORMANCE**  
**VAPOUR PERMEABLE ROOF TILE UNDERLAY**  
*for*  
**WARM AND COLD PITCHED ROOFS**  
*Without the use of roof space ventilation*